



★ ★ ★ ★ ★
**THE STANDARD
IN TIG WELDING**

The **Steady-Grip™**

for Precision Amperage Control

With a removable or adjustable "pistol grip" style handle, the new SGACV Steady-Grip™ gives the operator smooth, accurate, and ergonomic "trigger finger" control of the TIG Welding process. The Steady Grip™ can be used with most Constant Current GTAW power sources and provides machine contactor on-off, gas solenoid activation and full range amperage control.

- Complete ON/OFF and full Amperage Control
- Available for most power sources
- Protected against high frequency



Flex-Loc™ Torch (not included)

Velcro® fastener will fit any torch

Adjustable Grip
(3 positions)


Smooth "Trigger finger" for
"Steady" amperage control

Ergonomic Grip

(Patented)

Remove Handle for use as Linear Slide configuration

Replacement Parts

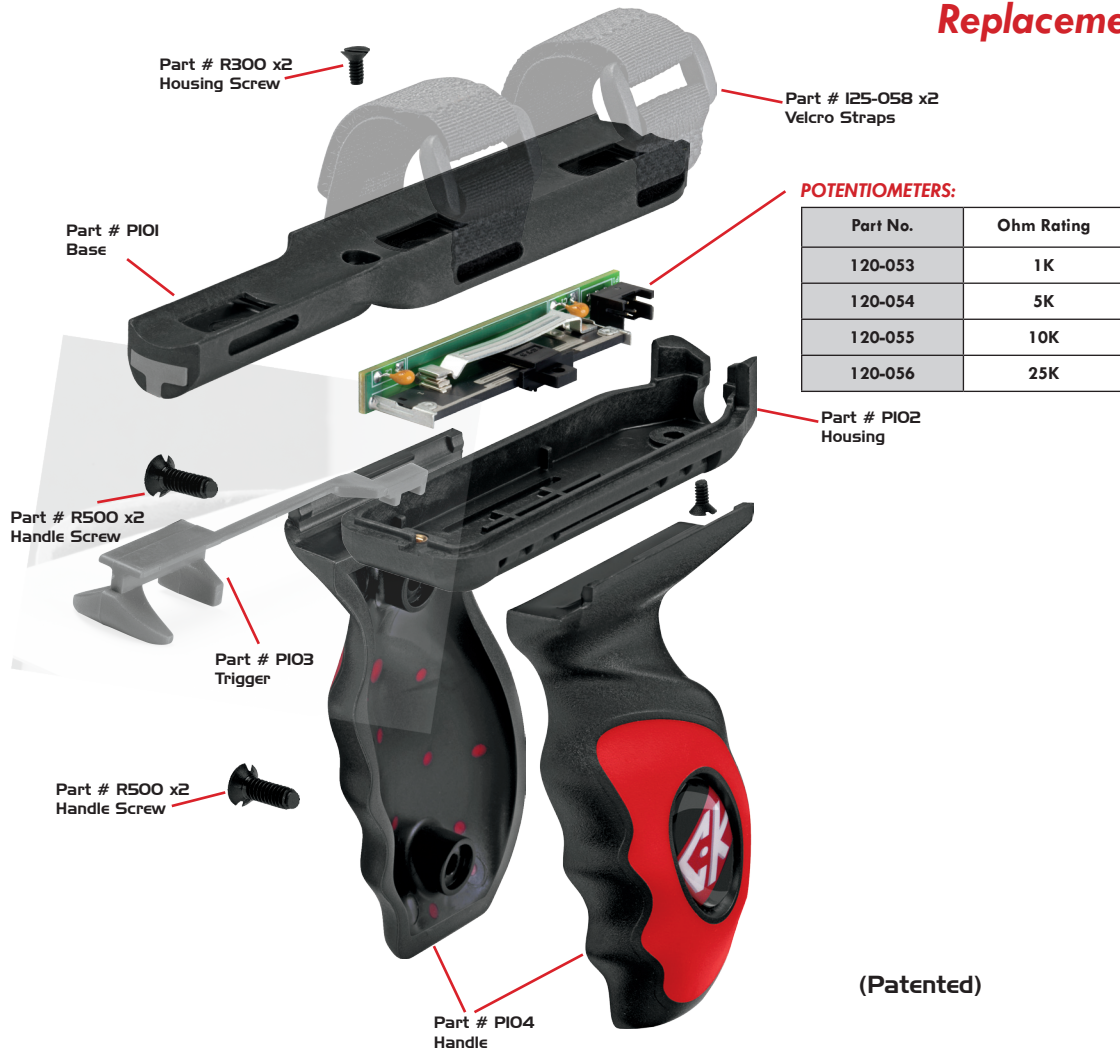

STEADY-GRIP™ AMPERAGE CONTROL SELECTOR CHART

MACHINE MAKE POTENTIOMETER RATING	CONTROL TYPE	PLUG CONFIG & PIN COUNT	CONTROL CABLE LENGTH	VELCRO® STRAPS*
				ONE SIZE FITS ALL
LINCOLN ELECTRIC 10K Ohm	Steady-Grip™	5 Pin Plug	14 ft. (4.2 m)	SGACV-10-1-L5
			26.5 ft. (8.0 m)	SGACV-10-2-L5
			53 ft. (16.2 m)	SGACV-10-3-L5
		6 Pin Plug	14 ft. (4.2 m)	SGACV-10-1-L6
			26.5 ft. (8.0 m)	SGACV-10-2-L6
			53 ft. (16.2 m)	SGACV-10-3-L6
MILLER ELECTRIC 1K Ohm	Steady-Grip™	14 Pin Plug	14 ft. (4.2 m)	SGACV-1-1-M14
			26.5 ft. (8.0 m)	SGACV-1-2-M14
			53 ft. (16.2 m)	SGACV-1-3-M14
		5 Pin Plug	14 ft. (4.2 m)	SGACV-1-1-M5
			26.5 ft. (8.0 m)	SGACV-1-2-M5
			53 ft. (16.2 m)	SGACV-1-3-M5
CK WORLDWIDE 10K Ohm	Steady-Grip™	5 Pin Plug	14 ft. (4.2 m)	SGACV-10-1-MT5
			26.5 ft. (8.0 m)	SGACV-10-2-MT5
			53 ft. (16.2 m)	SGACV-10-3-MT5

Form 461



www.CKWORLDWIDE.com